

SOLID TO SUCCEED






XCH907E

EMPTY CONTAINER HANDLER



XCMG

XCH907E

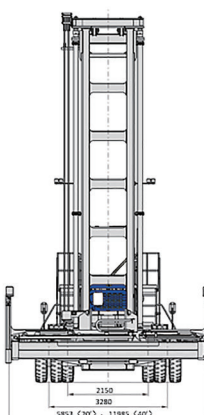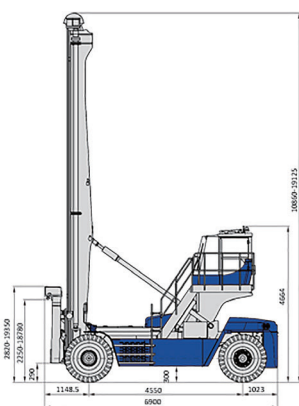

Item	Unit	Parameter	Tolerance
Length	mm	6900	±1%
Width	mm	6058	±1.5%
Height	Mast	10860/12280	±1%
	Cab	4664	±1%
	Max.height	19125/21780	±1%
Wheelbase	mm	4550	±1%
Trace	Front	3280	±2%
	Rear	2150	±2%
Overhang	Front	1150	±3%
	Rear	1030	±3%
Min. ground clearance	Under mast	290	≥95%
	Center of Wheelbase	300	≥95%
Max. traveling speed	Unloaded	26 km/h	±10%
	Rated load	22 km/h	±10%
Min. turning radius	mm	6200	≤105%
Max. drawbar pull	kN	110	≥90%
Max grade ability	%	25/20	≥90%
Dead weight	kg	41500	±3%
Rated lifting capacity	kg	9000	±5%
Height under twistlock	mm	2250	±1.5%
Max. lifting height	mm	18780	±1.5%
Mast tilting	Front	°	2 ±0.5°
	Rear	°	4 ±0.5°
Max. lifting speed	Unloaded	mm/s	600 ±10%
	4.5t load	mm/s	550 ±10%
Max. lowering speed	Unloaded	mm/s	600 ±10%
	4.5t load	mm/s	600 ±10%

- Large battery capacity & long battery life
- Fast charging, dual gun 300kW
- Save cost, 1kWh per container
- Convenient maintenance

