

SOLID TO SUCCEED





XCS4531K

CONTAINER REACH STACKER




XCMG

XCS4531K

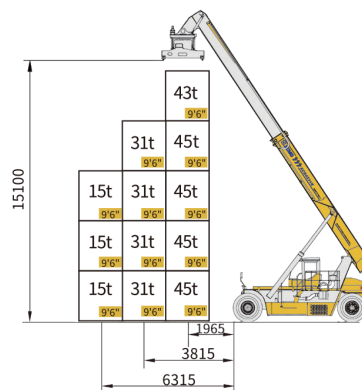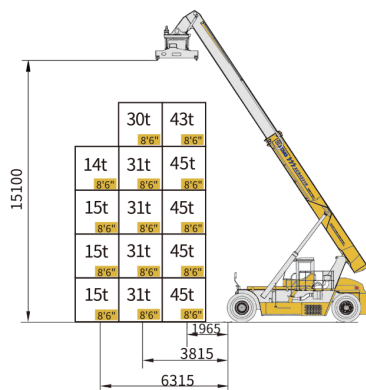

Technical parameters		Unit	Parameters
Engine	Model	/	VOLVO/CUMIMINS
	Rated power/speed	kW/rpm	265/2100
	Maximum torque/speed	Nm/rpm	1785/1260
	Emission level	-	Stage III/EU Stage V/T4F
Spreader	Model	-	XDJ450
	Sideshift	mm	±800
	Rotation angle	°	+105/-195
	Dead weight	kg	8000
	Applicable	-	ISO20'/40' Container
Boom	Max. lifting height	mm	15100
	Angle	°	0 ~ 60
Performance	Stack layers	-	5
	Rated capacity	kg	45000
	Lifting speed(Load/Unload)	mm/s	420/250
	Lowering speed(Load/Unload)	mm/s	360/300
	Drive speed(Load/Unload)	km/h	25/21
	Gradeability(Load/Unload)	%	39/32
	Min turning radius	mm	8000
	Transmission	-	DANA
	Drive axle	-	Kessler D102PL341
	Fuel tank capacity	L	600
	Tires	-	18.00-25 40PR
	Hydraulic system working pressure	bar	260
	Dead weight	kg	71200
	Dimension	mm	11340×6052×4670
	Wheelbase	mm	6000
	Min. ground clearance	mm	350
	Wheel track(front/rear)	mm	3033/2790

• Efficient and intelligent



High-end customized electrical system




Accurate weighing/on-board printing system



Reset fuse

• Environmentally friendly

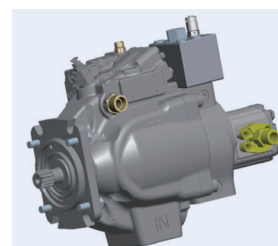

Unique energy-saving hydraulic system



High-position air intake system

• Safety and reliable



Automatic fire extinguishing system



The cab fully equipped with protective equipment

